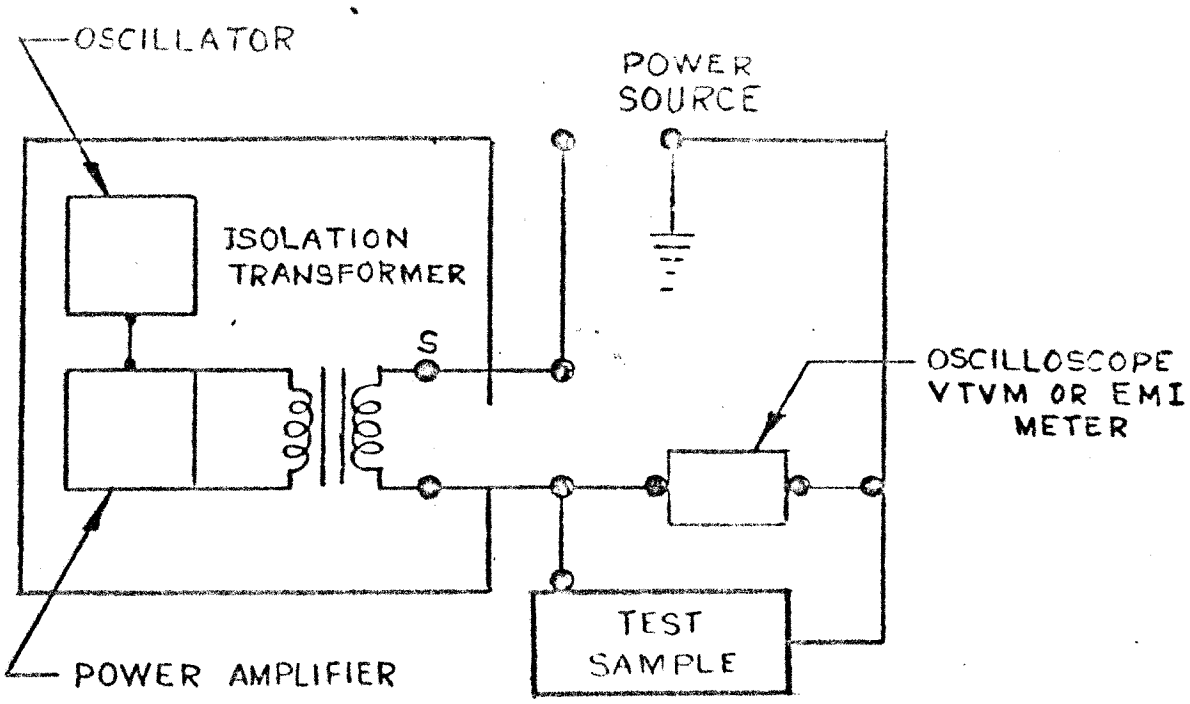

FIGURE CS01-1. Conducted susceptibility, 30 Hz to 5 kHz typical test setup

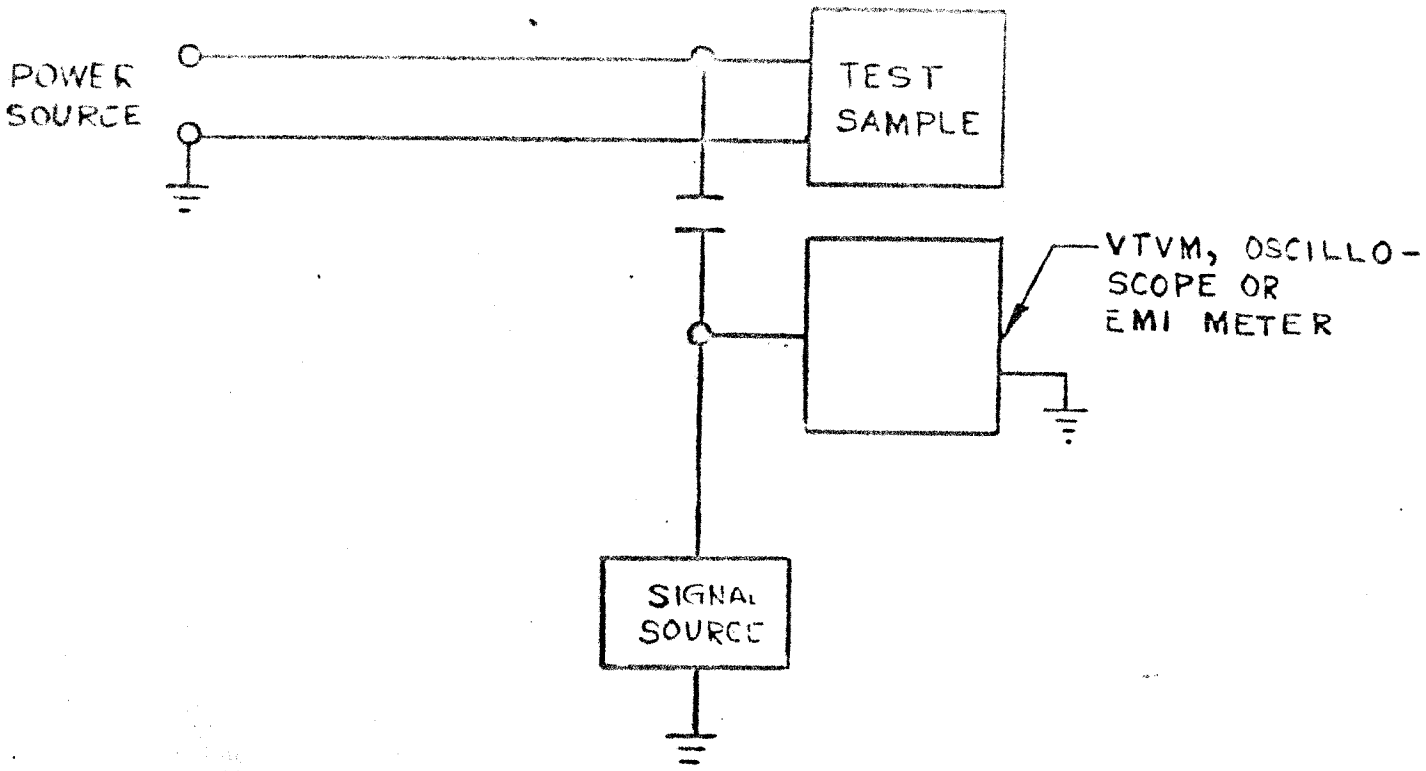

FIGURE C502-1. Conducted susceptibility 50 kHz to 250 MHz

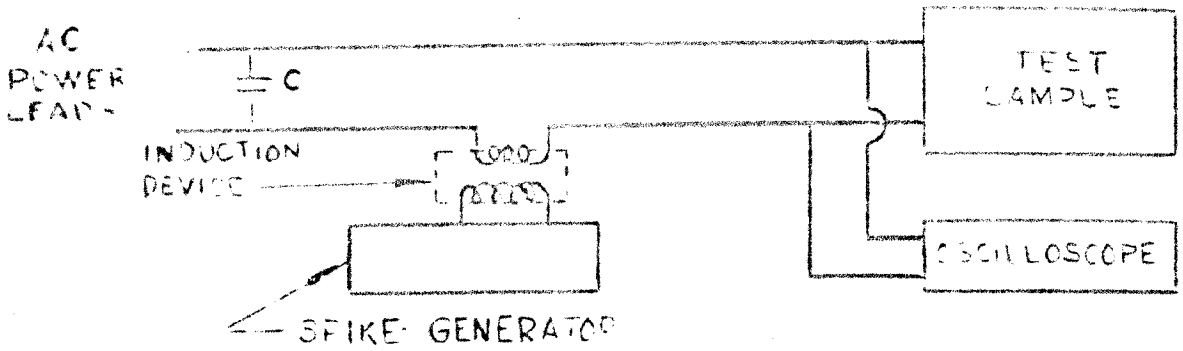

FIGURE CS06-1. Conducted susceptibility, spike, power leads; series injection

L = 20 μh

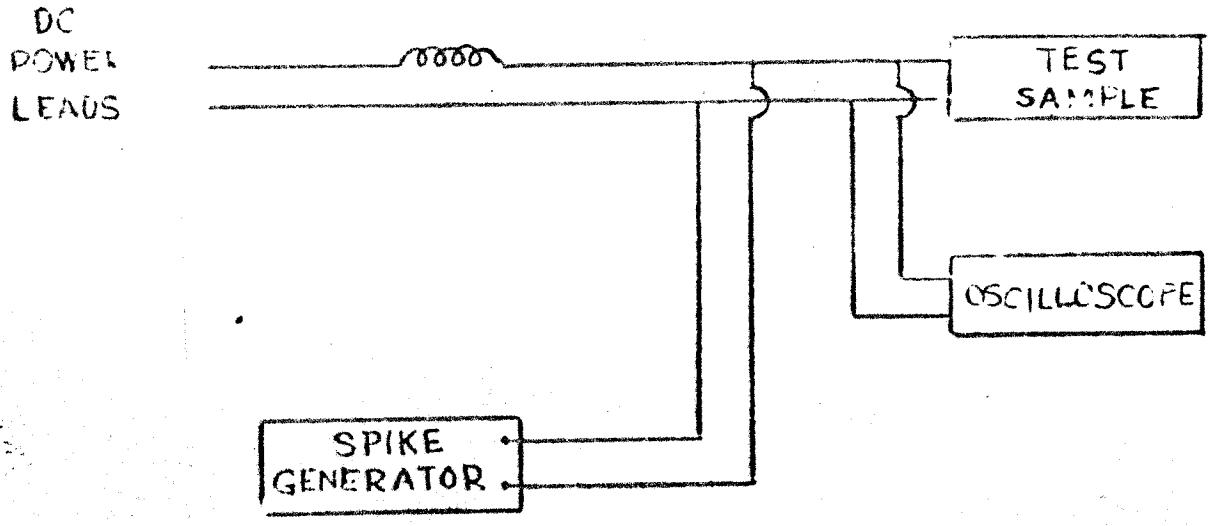

FIGURE CS06-2. Conducted susceptibility, spike, power leads; parallel injection

RADIATED EMISSIONS

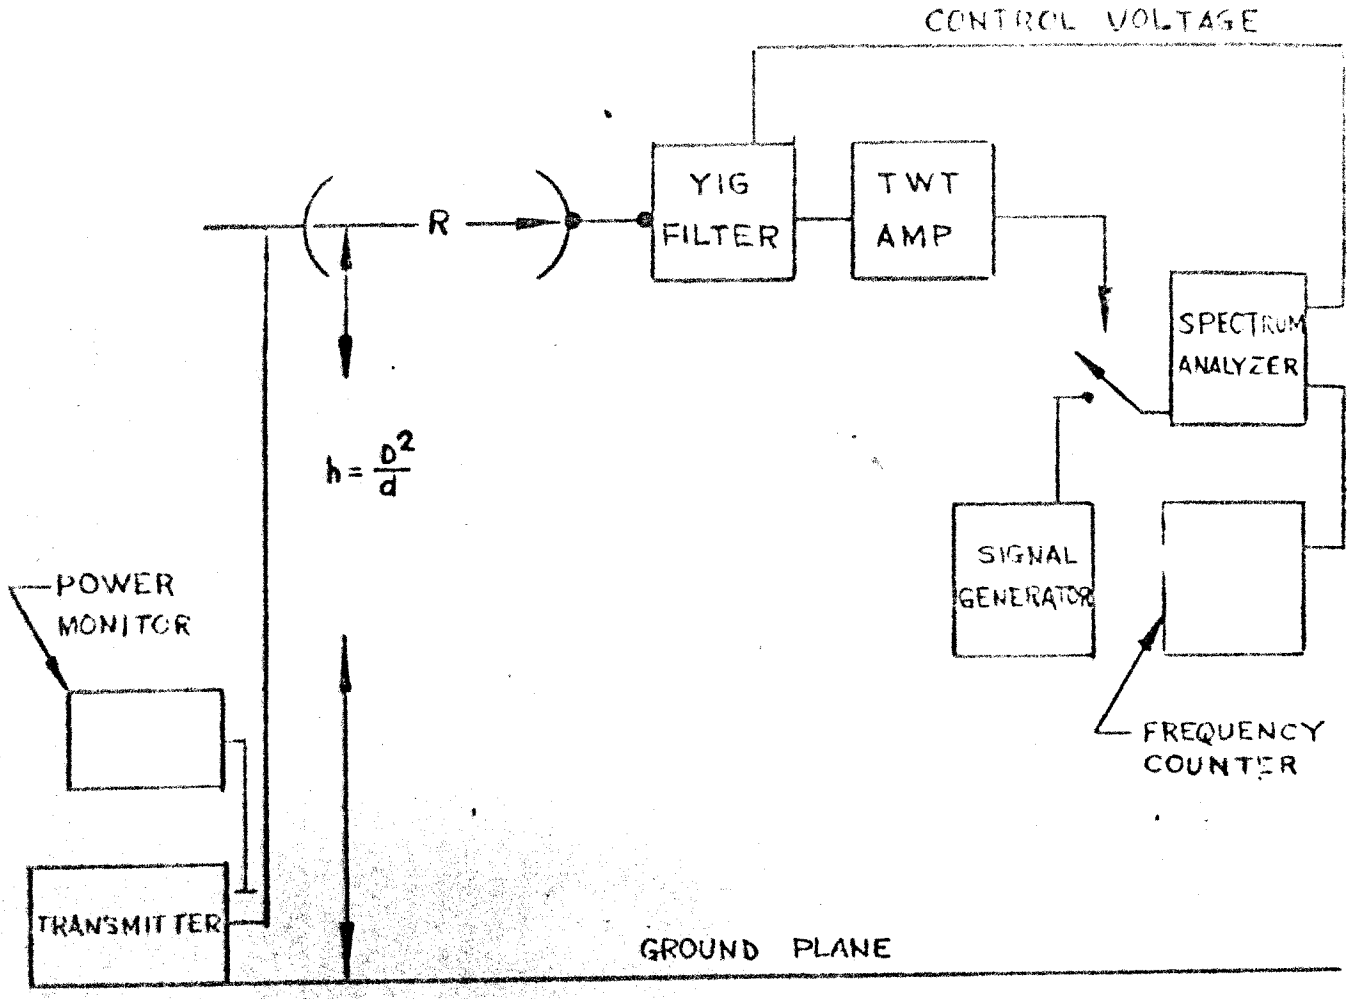

FIGURE RE03-1. Typical test setup --spurious and harmonic emissions

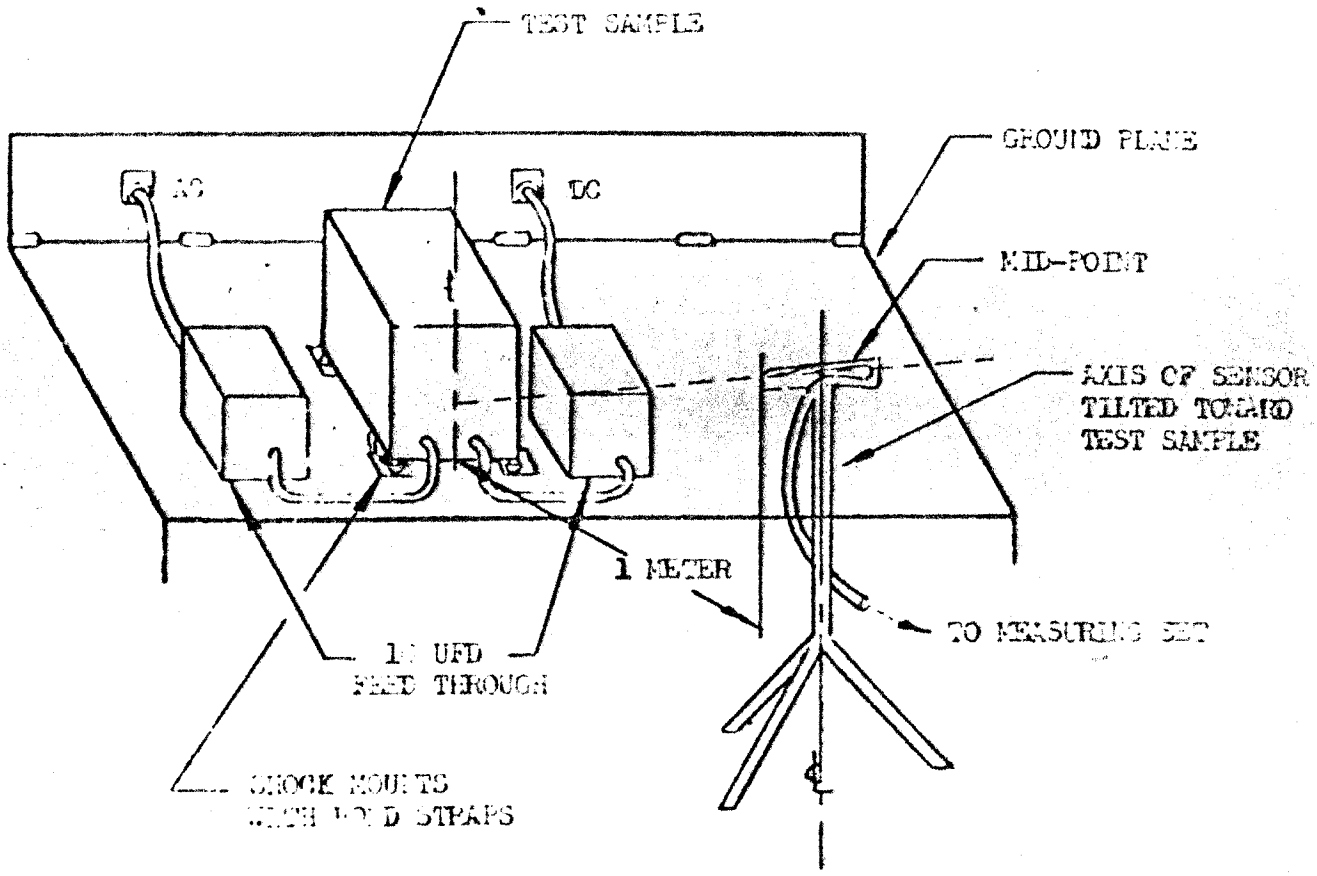

FIGURE (T) RE04-2. Typical test setup for radiation measurements (magnetic field sensor)

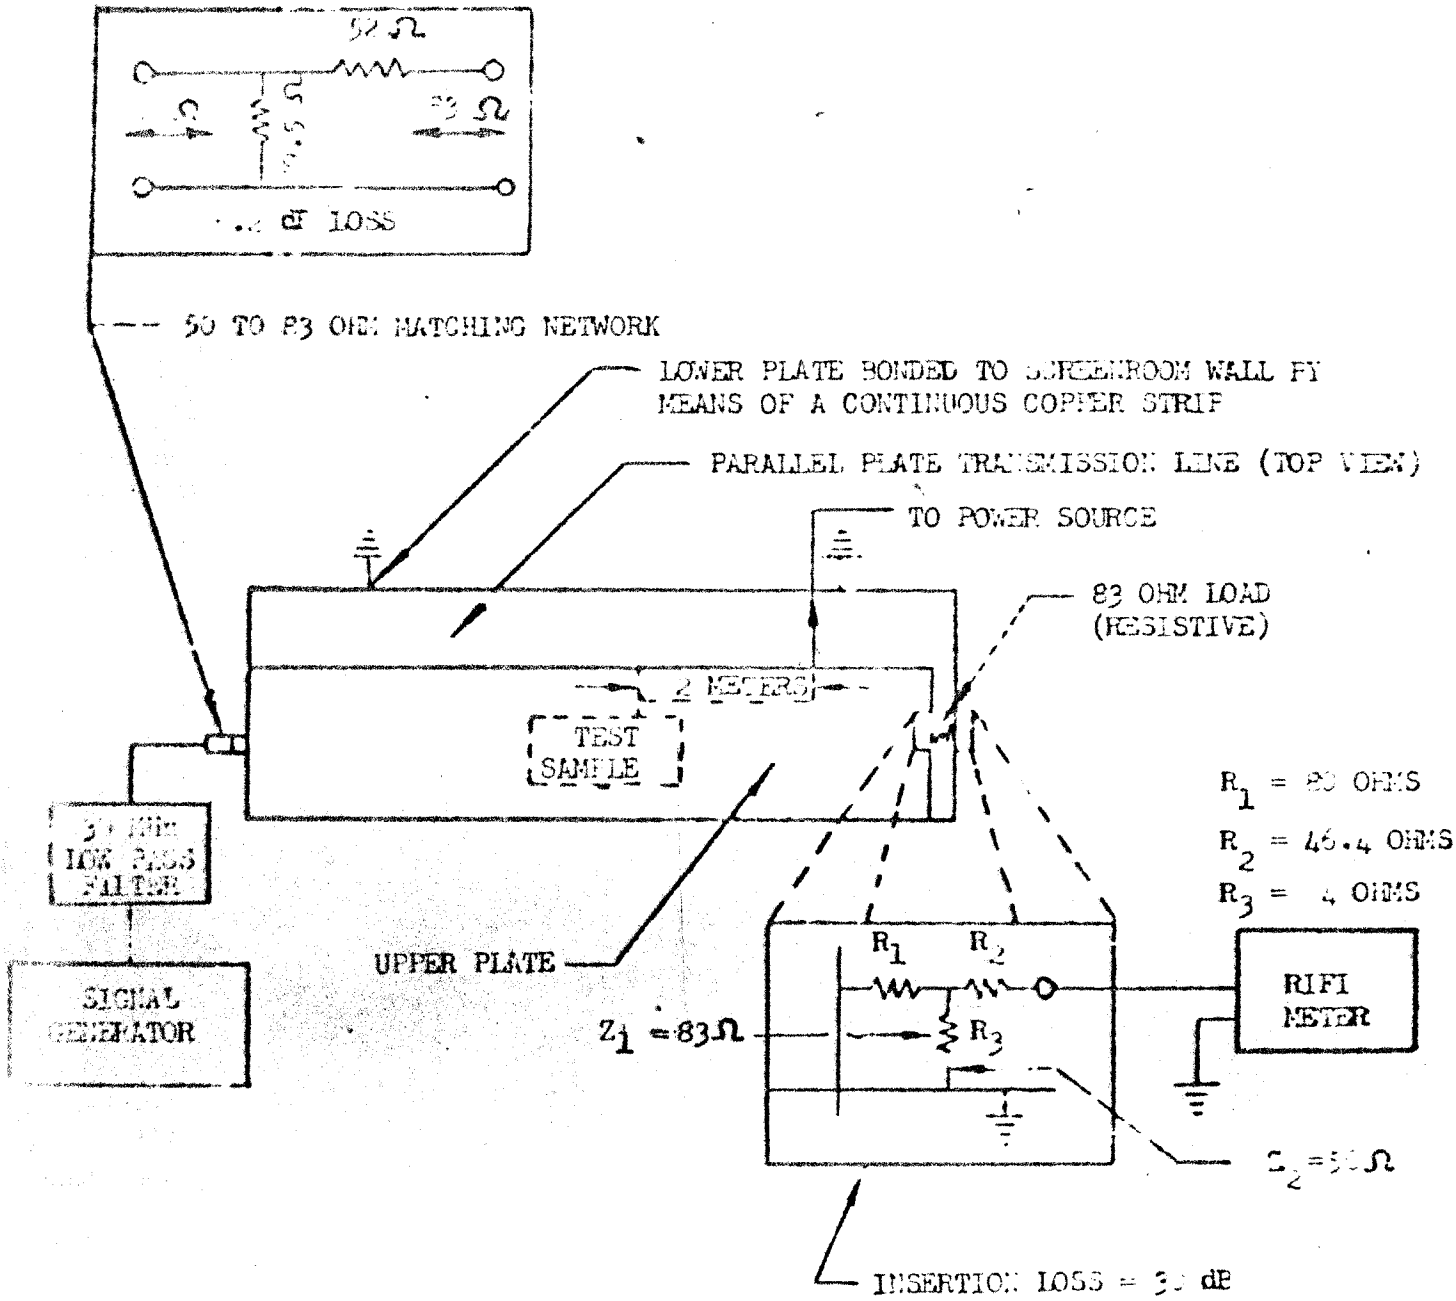

FIGURE [illegible]-3. Typical setup for susceptibility tests using parallel plate line